

DI331C

Reproduct Family Width Commercial height Installation Kitchen panel N° baskets Motor EAN code


Dishwashers 60 cm 82 cm Fully-integrated built-in Not supplied 3, Flexi Inverter 2.0 8017709346393



Programmes

60 ECO 50°	65°		
No. of programmes	10	ECO	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °C	Mix	Yes
Soak	Yes	Quiet (-2 dB)	Yes
Express 27'	Yes	Intense	Yes
Crystal	Yes	Hygiene 99,9%	Yes
Full express - 60 minutes	Yes	Daily 1/2 load	Yes

Options



Baskets

Grey	Largest loadable dish in	19,0 cm
Grey	upper basket	
	Lower Basket	With 2 foldable racks
In plastic on upper and lower basket	Lower basket with anti- drip inserts	Yes
With 1 foldable rack Yes	Largest loadable dish in lower basket	30,0 cm
	Grey In plastic on upper and lower basket With 1 foldable rack	Greyupper basketIn plastic on upper andLower Basketlower basketLower basket with anti- drip insertsWith 1 foldable rackLargest loadable dish in



Height adjustment of the upper basket

On three levels

Colour Inner Components

Top cover

Blue

Technical Features

FLEXI



Width (mm)
Depth (mm)
Product Height (mm)
Controls
Programme graphics
On/off indicator
Salt light indicator
Rinse aid indicator
End of cycle indicator
Washing system
Third spray arm
Water softener
Flood protection system
Water supply

598 mm 570 mm 818 mm Electronic Symbols Yes Light Light Acoustic signal Orbital Single With electronic setting **Total Acquastop** Single; cold/hot water r 60°C - energysave with water up to 35%

Max water hardness	100°fH;58°dH
Drying system	Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle
Steam protection	In plastic
Tank material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing, Sliding, FLEXIFIT
Min. and max. frontal panel weight	2 - 9 kg
Min. and max plinth height	100 - 228 mm
Adjustable feet	7cm, from 820 to 890 mm
Back cover	Yes
Depth of dishwasher with open door (mm)	1146
Back feet adjustable from front	Yes
	Drying system Steam protection Tank material Filter Concealed heating element Hinges Min. and max. frontal panel weight Min. and max plinth height Adjustable feet Back cover Depth of dishwasher with open door (mm) Back feet adjustable

In plastic

Performance / Energy Label




(Washing cycle)Energy consumption73 KWh[per 100 cycles, basedon the eco programme]Rated capacity (ps)13Water consumption [per 9,0 litrescycle]

Programme duration4:25 h:minAirborne acoustical43 dB(A) re 1 pWnoise emissions(spinning phase)Airborne acousticalBnoise emission classEnergy efficiency IndexEnergy efficiency Index43,8(EEI) (Washing cycle)43,8

Electrical Connection

Plug	(G) UK e Singapore	Frequency (Hz)	50 Hz
Connected power	1800 W	Type of connection	Single-phase
Current	13 A	Power supply cable	140 cm
Voltage	220-240 V	length	



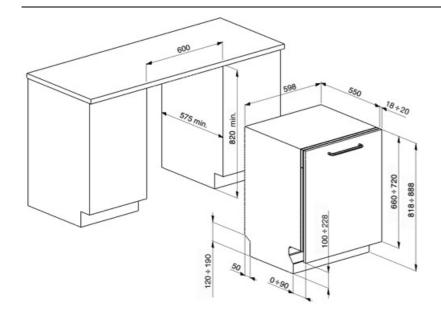



Compatible Accessories



KIT82CN

KITFLEXI



Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)

KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2



esmeg

Symbols glossary

۲	Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.	Å 82 cm ▼	COMM_HEIGHT_82_72dpi
Ø	Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.	FLEXI FIT	Models with new Flexi Fit hinges are able to be installed in kitchens with a plinth of just 5cms. With this new hinge design, the panel has a sliding movement from the bottom to the top, avoiding any possible interference of the panel with the plinth.
43 dB	Noise Level: Excellent insulation and special devices keep noise to a minimum.	ORBITAL SYSTEM	Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.
₽ 45°	Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.	65° ≷½≶	1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.
ECO 50°	Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.	65))))	Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.
灬	Soak programme: The soak programme provides a rinse to prevent dirt from drying.	27min	Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.
70°	Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.	tÖt	The symbols show the number of plate settings of the dishwasher.
ACOLLETON	Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.	000 9 lt	System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.
60 min		ął	
Ś		C G	Energy efficiency class C
75°	HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising	Avviates avviates	The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Benefit

Orbital Wash System

The Orbital Wash System ensures even water distribution, delivering deep cleaning while keeping noise levels low, thanks to its dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.

Flexifit hinge system

The Flexifit hinge system ensures smooth door movement, allowing for seamless integration into your kitchen design

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet. Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.