

# STL281DS



|                   |                           |
|-------------------|---------------------------|
| Product Family    | Dishwashers               |
| Commercial width  | 60 cm                     |
| Commercial height | 82 cm                     |
| Installation      | Fully-integrated built-in |
| Kitchen panel     | Not supplied              |
| N° baskets        | 2                         |
| EAN code          | 8017709306915             |



## Programs



|                      |               |          |     |
|----------------------|---------------|----------|-----|
| N. of programmes     | 5             | Mix      | Yes |
| Washing temperatures | 50, 65, 70 °C | Intense  | Yes |
| Soak                 | Yes           | 1/2 load | Yes |
| ECO                  | Yes           |          |     |

## Options



|                    |             |                            |
|--------------------|-------------|----------------------------|
| Delay timer option | 3-6-9 hours | Intensive wash zone option |
| Extra dry option   | Yes         |                            |

## Baskets



|                                       |                          |                                       |                  |
|---------------------------------------|--------------------------|---------------------------------------|------------------|
| Basket colour                         | Grey                     | Lower Basket                          | With fixed racks |
| Basket components colour              | Grey                     | Lower basket with anti-drip inserts   | Yes              |
| Upper Basket                          | With central fixed racks | Largest loadable dish in lower basket | 30,0 cm          |
| Glass holder                          | Yes                      | Colour Inner Components               | Blue             |
| Height adjustment of the upper basket | On three levels (5 cm)   | Cutlery basket                        | Yes              |
| Largest loadable dish in upper basket | 25,0 cm                  |                                       |                  |

## Technical Features



|                                |                                                                        |                                                |                                                                                                   |
|--------------------------------|------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Width (mm)</b>              | 598 mm                                                                 | <b>Max water hardness</b>                      | 100°fH;58°dH                                                                                      |
| <b>Depth (mm)</b>              | 545 mm                                                                 | <b>Drying system</b>                           | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| <b>Product Height (mm)</b>     | 818 mm                                                                 | <b>Steam protection</b>                        | In plastic                                                                                        |
| <b>Controls</b>                | Electronic                                                             | <b>Tube material</b>                           | Stainless steel                                                                                   |
| <b>Programme graphics</b>      | Symbols                                                                | <b>Filter</b>                                  | Stainless steel                                                                                   |
| <b>On/off indicator</b>        | Yes                                                                    | <b>Concealed heating element</b>               | Yes                                                                                               |
| <b>Salt light indicator</b>    | Light                                                                  | <b>Hinges</b>                                  | Self balancing, Sliding, FLEXIFIT                                                                 |
| <b>Rinse aid indicator</b>     | Light                                                                  | <b>Min. and max. frontal panel weight</b>      | 2,5 - 11 kg                                                                                       |
| <b>End of cycle indicator</b>  | Acoustic signal                                                        | <b>Min. and max plinth height</b>              | 50 - 215 mm                                                                                       |
| <b>Washing system</b>          | Standard                                                               | <b>Adjustable feet</b>                         | 7cm, from 820 to 890 mm                                                                           |
| <b>Third spray arm</b>         | Single                                                                 | <b>Back cover</b>                              | Yes                                                                                               |
| <b>Water softener</b>          | With electronic setting                                                | <b>Depth of dishwasher with open door (mm)</b> | 1168                                                                                              |
| <b>Flood protection system</b> | Single Acquastop                                                       | <b>Back feet adjustable from front</b>         | Yes                                                                                               |
| <b>Water supply</b>            | Single; cold/hot water max. 60°C - energysave with hot water up to 35% | <b>Top cover</b>                               | In plastic                                                                                        |


## Performance / Energy Label - Reg. 2019



|                                                                        |             |                                                 |                  |
|------------------------------------------------------------------------|-------------|-------------------------------------------------|------------------|
| <b>Energy Efficiency Class</b>                                         | D           | <b>Programme duration</b>                       | 3:35 h:min       |
| <b>Energy consumption [per 100 cycles, based on the eco programme]</b> | 84 KWh      | <b>Airborne acoustical noise emissions</b>      | 48 dB(A) re 1 pW |
| <b>Rated capacity (ps)</b>                                             | 13          | <b>Airborne acoustical noise emission class</b> | C                |
| <b>Water consumption [per cycle]</b>                                   | 12.0 litres | <b>Energy efficiency Index (EEI)</b>            | 49.9             |

## Electrical Connection

|                        |              |                                  |              |
|------------------------|--------------|----------------------------------|--------------|
| <b>Plug</b>            | (F;E) Schuko | <b>Frequency (Hz)</b>            | 50 Hz        |
| <b>Connected power</b> | 1800 W       | <b>Type of connection</b>        | Single-phase |
| <b>Current</b>         | 10 A         | <b>Power supply cable length</b> | 140 cm       |
| <b>Voltage</b>         | 220-240 V    |                                  |              |

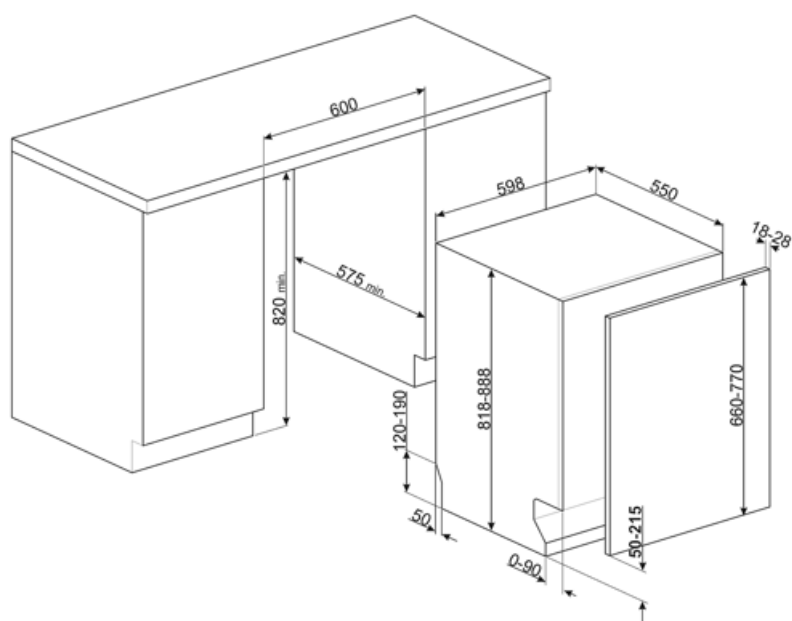

## Compatible Accessories



**KIT82CN**



**KIT82CX**



**KITFLEXI**

Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)



**KITPL60B**

Toe-kick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



**KITPL60N**

Toe-kick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



**KITPL60X**

Toe-kick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



**KITPLV2**

Kit extension for dishwasher and washing machine: lenght mt. 2

## Symbols glossary

|                                                                                    |                                                                                                                                                                                      |                                                                                     |                                                                                                                                  |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
|    | Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance. |    | To improve the drying of dishes without leaving stains.                                                                          |
|    | Energy efficiency class D                                                                                                                                                            |    | 82 cm high                                                                                                                       |
|    | Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.                                |    | The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm. |
|    | 6,8                                                                                                                                                                                  |    | Noise Level: Excellent insulation and special devices keep noise to a minimum.                                                   |
|    | EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.                                                                                                           |    | 1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.                    |
|    | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.                                  |    | Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.           |
|  | Soak programme: The soak programme provides a rinse to prevent dirt from drying.                                                                                                     |  | Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°C eliminating virtually all bacteria.       |
|  | 13 place settings: Number of place settings.                                                                                                                                         |  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.           |

---

## Benefit (TT)

---

### Flexifit hinge system

Smooth-running door for optimal integration into the kitchen design

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet.

Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.